

## **Standard Pleated Blind**

#### **Product information**

Verosol's Standard Pleated Blind combines the soft appeal of a curtain with the versatility and simplicity of a blind. The ideal solution for heat and light control, and the blind almost disappears when raised. Simple and elegant, with a small stack height and short projection, giving you an uninterrupted view from your home or office window. In addition to the standard, pleated blinds are available in an array of different shapes and configurations in order to accommodate even the most obscure window.



#### **Technical information**


Product Code	P70.0		P70.1
Product Name	Standard Pleat		Standard Pleat
Operation	Cord Operation		Profile Operation
Dimensions	Width *	300mm min - 3400mm max *	300mm min-1000mm max *
	Drop	200mm min - 3600mm max	400mm min-2000mm max
	Cord Lock	2900mm maximum width	N/A
	Maximum Area	10m2	2m2
Head Rail	Material	Extruded Aluminium Alloy- Asymetric Profile	
	Dimensions	33mm W x 20mm H	
Bottom Rail	Material	Extruded Aluminium Alloy- Asymetric Profile	
	Dimensions	30mm W x 12mm H	
	Colours	RAL 9001,9004,9010,7016,1001,1019, Anodised	
	Paint	Electrostatic Powder coated and Baked	
Inner Rail	Material	UV Stabilised Acrylonitrile Butadiene Styrebe [ABS]	
		Plastic	
End Caps	Material	UV Stabilised Polymer Acrylic	
	Colours	Coordinated chosen from Grey, Black, Sandy Beige, White	
Lift and Blind Cords	Material	Braided Polyester [minimum diameter: 2.2mm]	
	Colours	Grey, Black, Sandy Beige, White	
Control Lock	Material	ULTEM / PPS-Fortran	
	Туре	Front Mounted	
	Colour	Grey with coordinated colour cap	
Cord Position	Lift Cords 80mm from edge ; Maximum spacing 500mm		
Installation Brackets	Material	Electro Plated Steel	
	Operation	Top or Face Fixing - concealed when installed	


# **Standard Pleated Blind**


### Optional

Guiding	Angle	Up to 15° angle from vertical
	Maximum Width	1500mm
	Maximum Area	4,8m2
	Cable	Polyester cable with Kevlar, 20mm from edge
Bottom Installation	Material	Stainless Steel
Bracket		
Guiding Channels	Material	Extruded Aluminium Alloy U profile
	Colours	RAL 9010,1001,8025,9004,7016,9001,1019, alu Anodised
	Dimensions	15mm W x 37mm H

### **System diagrams**



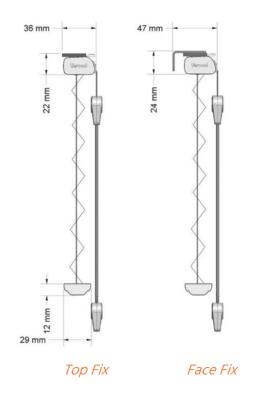

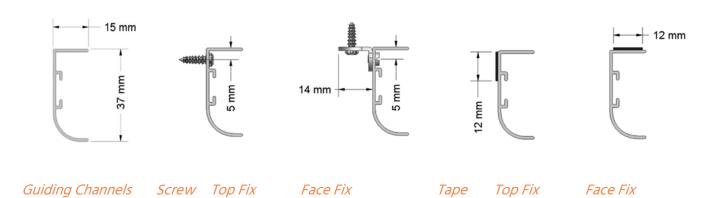

<sup>\*</sup> When the maximum fabric segment width of 2200mm is exceeded, blinds will have three equal segments with two overlaps in the blind. The maximum width of VeroCell fabric is 3000mm, the maximum drop of VeroCell fabric is 2700mm.